




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G01N 21/63, G01M 11/00		A1	(11) International Publication Number: WO 00/37925
			(43) International Publication Date: 29 June 2000 (29.06.00)
(21) International Application Number: PCT/AU99/01028		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 19 November 1999 (19.11.99)		<p>Published With international search report.</p>	
(30) Priority Data:			
PP 7808 18 December 1998 (18.12.98) AU			
PQ 0126 3 May 1999 (03.05.99) AU			
(71) Applicant (for all designated States except US): FUTURE FIBRE TECHNOLOGIES PTY LTD [AU/AU]; 20 Viewtech Place, Rowville, VIC 3178 (AU).			
(72) Inventors; and			
(75) Inventors/Applicants (for US only): TAPANES, Edward, E. [AU/AU]; 2 Ralton Avenue, Glen Waverley, VIC 3150 (AU). GOODE, Jason, R. [AU/AU]; 4 Spalding Court, Rowville, VIC 3178 (AU). KATSIFOLIS, Jim [AU/AU]; Unit 2/91 Osbourne Street, South Yarra, VIC 3141 (AU).			
(74) Agent: WILSON, Stephen, Henry; Griffith Hack, Patent & Trade Mark Attorneys, 509 St. Kilda Road, Melbourne, VIC 3004 (AU).			

(54) Title: APPARATUS AND METHOD FOR MONITORING A STRUCTURE USING A COUNTER-PROPAGATING SIGNAL METHOD FOR LOCATING EVENTS

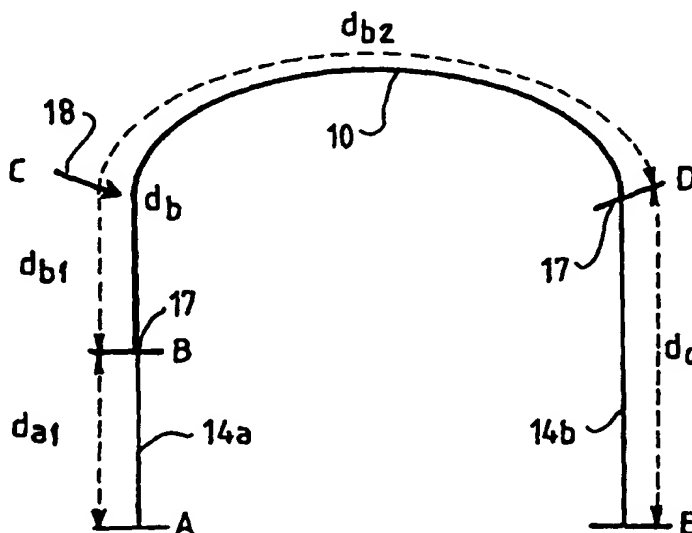

(57) Abstract

An apparatus and method for monitoring a structure such as machines, buildings, fibre optic communication links and infra-structure is disclosed which includes a waveguide (10) and a light source (20) for launching light into both ends of the waveguide (10) so that counter-propagating light signals are produced in the waveguide (10). The waveguide (10) is in the form of an optical fibre or fibre bundle formed from silica and in which the characteristic of the light is modified or effected by an external parameter caused by an event. A detector (30) is provided for detecting light form both ends of the waveguide (10) and for determining the time delay or difference between the modified signals which have been effected by the parameter in order to determine the location of the event along the length of the waveguide (10).

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						